

Essential TKS



NEW Essential



Parameters

Typology	OUTDOOR		
Pixel Pitch	3.9 mm	4.8 mm	5.9 mm
LED Configuration	SMD1921	SMD1921	SMD2727
Brightness	2000~5000 nit		
Module Size (mm)	250x500		
Cabinet Size (mm)	500 (W)× 500 (H)× 96 (D)		
Refresh Rate	1920 Hz		
Gray Scale	14 bits		
View Angle	H 140° / V 140°		
IP Rating (Front/Rear)	IP 65 (Front) / IP 65 (Rear)		
Cabinet Weight	Estimated: 13.5kg/pcs		



info@MicrobusGroup.se | Vxl. 040 – 53 96 80 | Org.nr 556235-7151 | Företagsinfo: www.MicrobusGroup.se


Våra produkter: www.LEDdisplay.se

- MALMÖ**
Microbus AB
Härligskungsgatan 8
232 34 Arlöv, Sweden
Tel. 040 – 53 96 80
- GÖTEBORG**
Microbus AB
Hults Gata 24
436 44 Asklöv, Sweden
Tel. 031 – 79 71 555
- VARBERG**
Microbus AB
Järngatan 10
432 32 Varberg, Sweden
Tel. 0340 – 54 21 10
- SHENZHEN**
Microbus AB
Room 905, floor 9 HuaMei
HuaMei road, SongGang
Bao'an Shenzhen, China




Climbing function

- Built in climbing handle, with yellow markings for warning, for rapid recognition of the climbing handle on site.
- Lightweight design, single person install and dismantle.

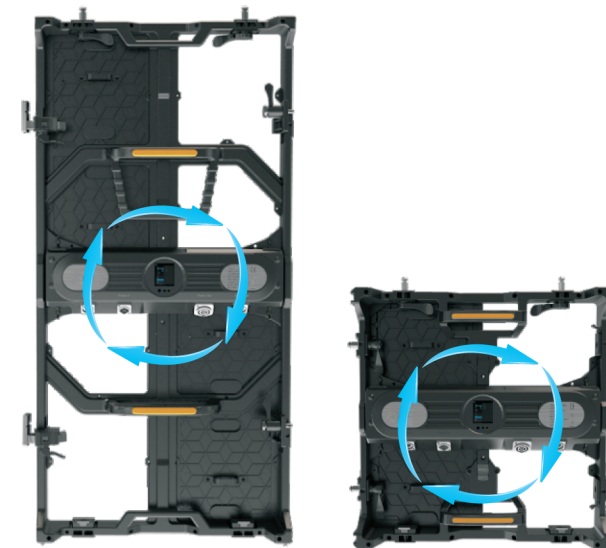


Universal power box and LED module

The power box and LED modules fit different cabinet sizes of 500mm x 500mm, 500mm x 1000mm.

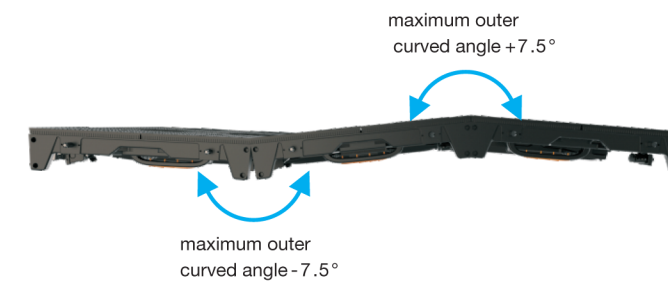

Curve cabinet design

With the same locking system both flat and curve installations fit different types of installation requirements.

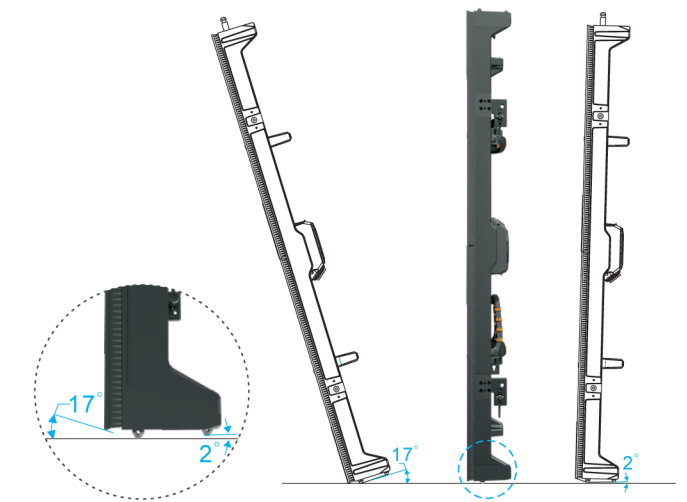

Anti-collision cabinet design

The sloping bottom of the cabinet is for protection of the LED lamps, avoiding collision between mask and plastic chassis. This gives better visual quality and allows the cabinet to stand on its own.



Human engineering sloping signal & power socket design

Both convenient and allows more space for installation. Aluminum alloy die casted power box integrated with the power supply, receiving card and hub board makes it more convenient for replacement, makes it stronger and makes it a better heat sink.